

ANT-234-002

Coaxial Lightning Arrester 0-3 GHz UHF-Male/Female



Applications

Protects Outdoor Antennas for

- HF, VHF, UHF, GMRS, Two-Way Radio
- Amateur (Ham) Radio Installations
- Citizens Band (CB) Radio
- P25 Public Safety Applications



Product Features

- Reliable Wide-band Performance (DC ~ 3 GHz)
- 230V Discharge Voltage (2.5x Standard)
- Bi-Directional Protection
- Very Low RF Insertion Loss (Signal Attenuation)
- Gas Discharge Tube with Multi-Strike Capability
- High Quality Construction - Outdoor Mountable
- UHF Male (PL-259) to UHF Female (SO-239)
- Ground Wire Lug

Ordering Information

Part No.	Description
ANT-234-002	Proxicast Coaxial Lightning Arrester for 0 to 3 GHz (UHF-Male/UHF-Female)

General Description

This 230V gas discharge tube coaxial lightning surge protector features UHF Male (PL-259) and Female (SO-239) connectors and wide-band operation from DC to 3 GHz with low RF insertion loss. It effectively dissipates the excess energy caused by lightning strikes, preventing it from reaching your precious equipment. It can absorb up to 2.5 times the energy of standard 90V arresters.

The arrester has a Male PL295 and a female SO239 connector for in-line installation into your coax existing cable feed line, providing reliable protection with minimal signal loss.

This antenna surge protector will pass DC, so it is suitable for applications where DC is carried through the coax cable, such as remote amplifiers and LNAs. Both connector ports are equally protected - it can be installed in either orientation. A ground lug on the housing provides superior grounding.

Pro-Grade arresters are constructed of high-quality materials to withstand the harshest weather conditions.

A coaxial lightning suppressor should be installed between outdoor antennas and radio equipment and as close as possible to the equipment to be protected, often at the point where the coax cable enters the building. This protects equipment, structures and personnel from high-energy electrical pulses carried through the coax cable either from a direct or nearby lightning strike

Consult your local building, fire, safety, or insurance codes for proper lightning protection system design for your application.

All outdoor coax connections should be weather-proofed to minimize damage caused by moisture in the connectors or cabling. Use our Self-Bonding silicone tape (ANT-900-002) for fast and easy connection sealing.

ANT-234-002

Coaxial Lightning Arrester 0-3 GHz UHF-Male/Female



Electrical Specifications

Parameter	Rating
Frequency Range	0 to 3 GHz
Discharge Voltage	DC 230V - replaceable gas discharge tube
Max Discharge Current	10 kA (8/20 μ s)
Insertion Loss	< 0.2 dB
VSWR	< 1.2
Impedance	50 Ohm
Max Input Power	200 W

Mechanical Specifications

Parameter	Rating
Connector Types	UHF Male PL-259 & UHF Female SO-239
Ground Lug	M4 Screw Lug - 8 AWG Max Wire Diameter
Materials (RoHS Compliant)	Body: Nickel Plated Brass
Dimensions	2.4 x 1 in (60.6 x 25 mm)
Weight	4.5 oz (127.5 g)
Operating Temperature	-40°C to +85°C

Operation of this device outside the parameter ranges given above may cause permanent damage.


ANT-234-002

Coaxial Lightning Arrester 0-3 GHz UHF-Male/Female



Mechanical Dimensions

Dimensions in millimeters

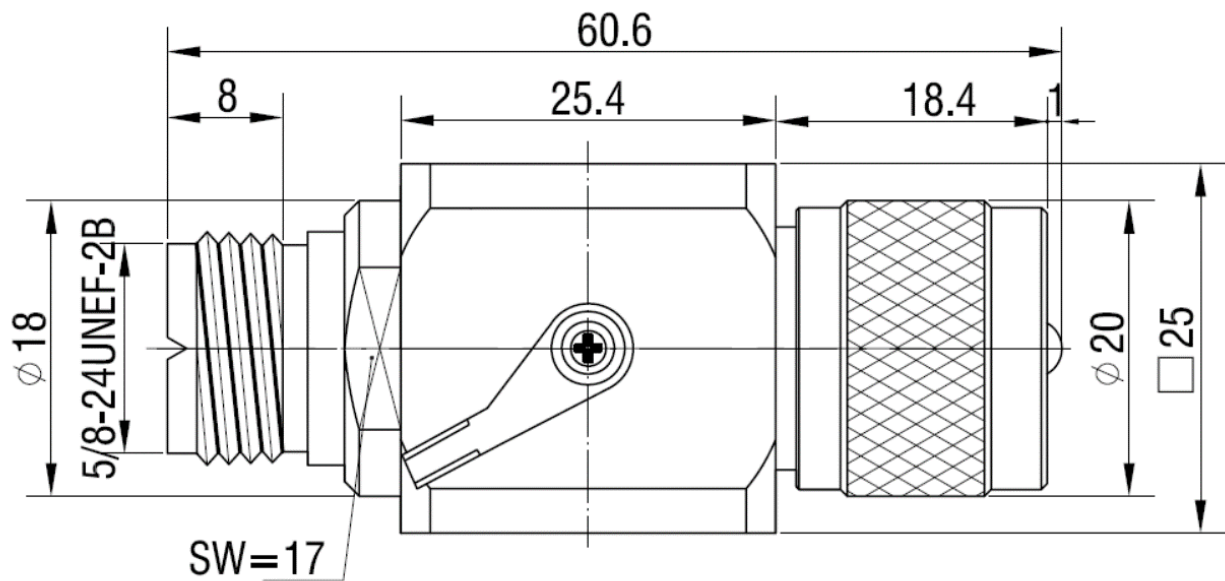

ANT-234-002

Coaxial Lightning Arrester 0-3 GHz UHF-Male/Female



Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: www.proxicast.com Tel: 1-877-777-7694

Email: sales@proxicast.com 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: support@proxicast.com

Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.