

ANT-130-005

Ultra Low-Profile 2.4/5.8 Wi-Fi Omni-Directional Antenna



Applications

- Kiosks
- Vending Machines
- Digital Signage
- Point-of-Sale Terminals
- Vehicles
- Video Surveillance
- Covert Installations

Product Features

- Extremely Low Profile ~ 0.6 in. high x 1.8 in dia.
- Hole / Screw Mounted
- Weatherproof, Compact & Light-weight
- Vandal Resistant – no exposed cable
- RP-SMA Male Connector
- Compatible with 2.4 & 5.8 GHz Wi-Fi Systems
- Compatible with most 802.11 a/b/g/n/ac Access Points & Routers



Ordering Information

Part No.	Description
ANT-130-005	Proxicast Ultra Low-Profile Wi-Fi Omni-Directional 2 dBi Screw Mount Antenna with 6 ft coax & RP-SMA male

General Description

This extremely low profile (< 0.6 inches tall) fixed mount omni-directional antenna provides 2 dBi of gain and works on all 2.4 & 5.8 GHz Wi-Fi frequency bands worldwide.

Permanently mounts via a 1/2 in. (12 mm) hole with locking internal nut. Resists vandalism with no exposed coax cable. Includes low-loss coax fed through center mounting post.

Designed for applications requiring an inconspicuous low-profile external antenna such as kiosks, vending machines, equipment panels, conference rooms, etc. Can also be vehicle mounted for buses, vans, trucks or other mobile installations.

Integrated Reverse Polarity SMA male plug connector mates with RPSMA female jack on access points, routers, etc.

For MIMO applications mount 2 or more identical antennas at least 5 inches apart.

This antenna is also available for Cellular frequencies (3G/4G/LTE). See ANT-120-003.

ANT-130-005

Ultra Low-Profile 2.4/5.8 Wi-Fi Omni-Directional Antenna



Electrical Specifications

Parameter	Rating
Frequency Range	2.4 & 5.8 GHz
Peak Gain	2 dBi
VSWR	≤1.5:1
Input Impedance	50 Ohm
Polarization	Vertical
Max Input Power	20 W
Ground Plane	Not Required
DC Grounded	No

Mechanical Specifications

Parameter	Rating
Connector Type	Reverse Polarity SMA (RPSMA) Male (plug)
Cable Length	6.7 ft (2 m) of low-loss RG316 coax
Mounting	Screw Mount via 0.5 inch (12mm) hole
Dimensions	0.59 in (15 mm) High 1.8 in (46 mm) Diameter
Materials	Radome: UV stabilized ABS plastic Connector: Brass Mounting Post: Brass 3M Adhesive Pad
Antenna Color	Black
Weight	1 oz (28 g) excluding coax
Operating Temperature	-30°C to +75°C


Operation of this device outside the parameter ranges given above may cause permanent damage.

ANT-130-005

Ultra Low-Profile 2.4/5.8 Wi-Fi Omni-Directional Antenna




Radiation Patterns

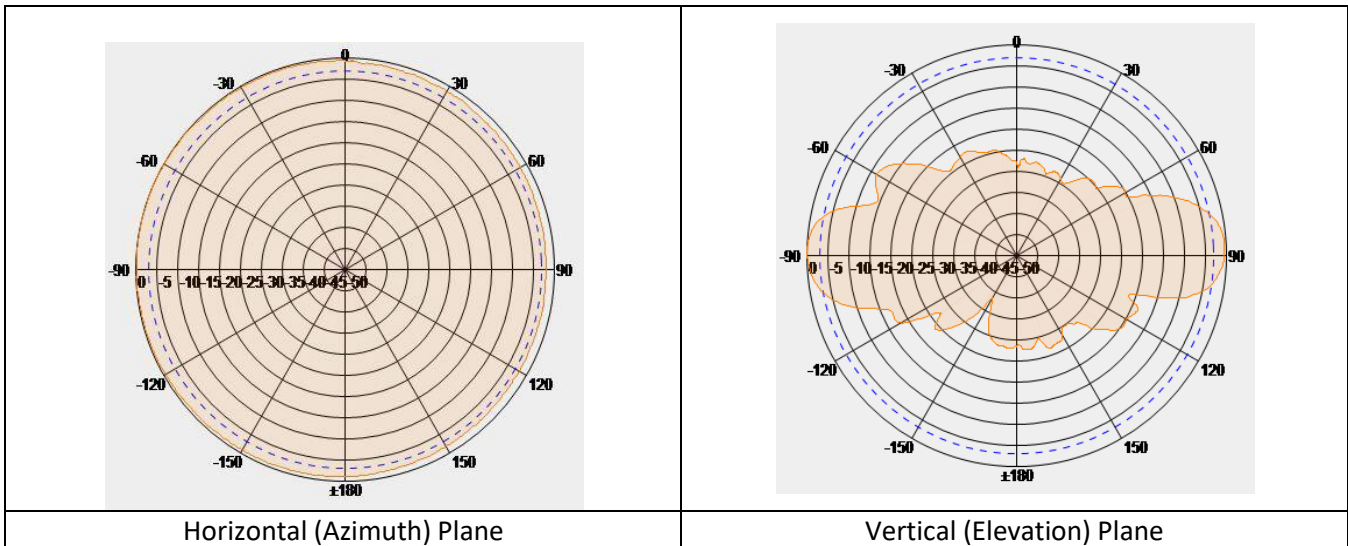

VSWR

CH1 A/R SWR MKR 1: 1.409 U
 REF 1.000 U 1.000U/ 2 400 000 000.HZ

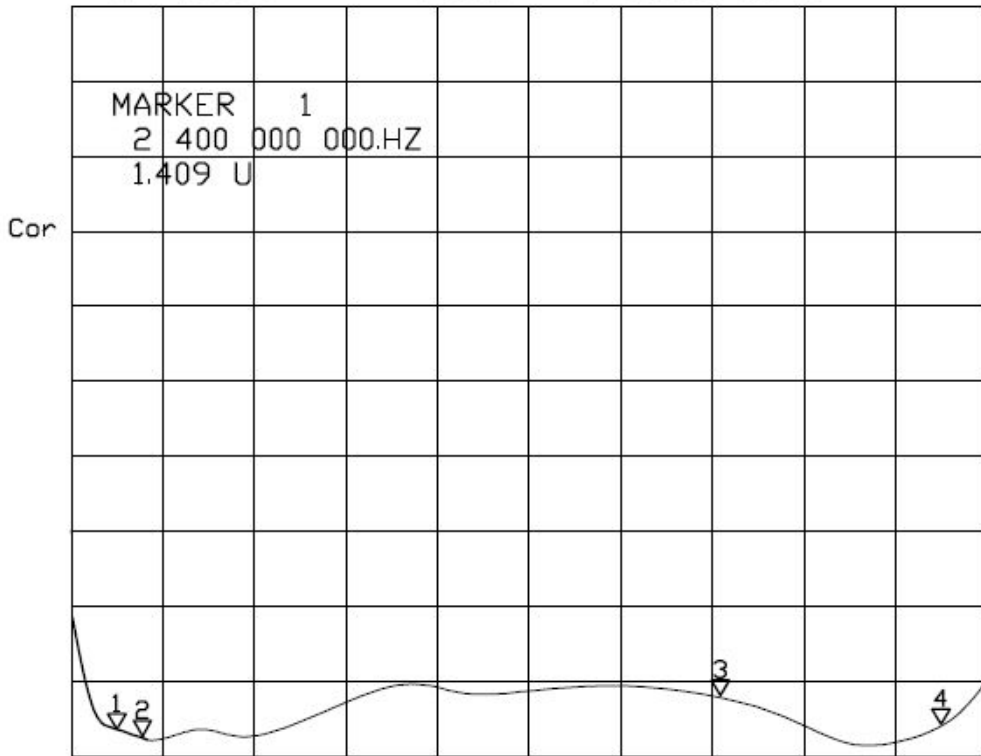

CH1 START 2 200 000 000.HZ

STOP 6 000 000 000.HZ


ANT-130-005

Ultra Low-Profile 2.4/5.8 Wi-Fi Omni-Directional Antenna



Mechanical Dimensions

Dimensions in millimeters

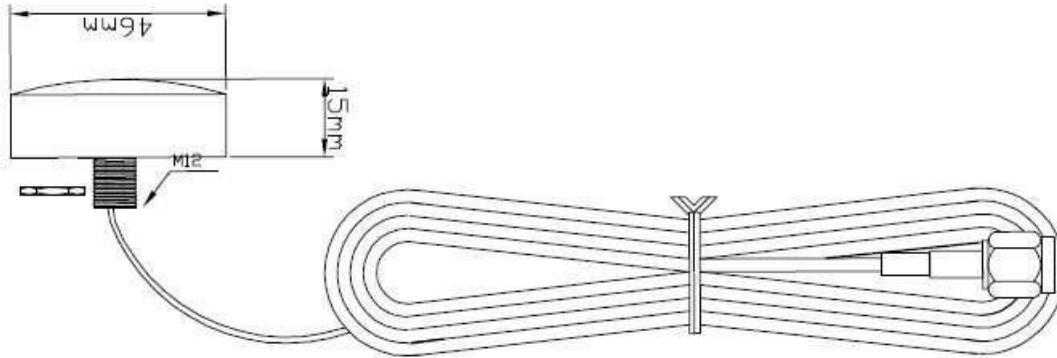

Product Images



ANT-130-005

Ultra Low-Profile 2.4/5.8 Wi-Fi Omni-Directional Antenna



Installation Instructions

- Position away from:
 - CRT/TVs
 - Lighting fixtures
 - Motors
 - Other wireless devices
 - Large vertical metal or concrete objects
 - Low-E or tinted/coated windows
- Drill a 0.5 inch (12 mm) diameter hole in a horizontal flat surface
- Remove mounting nut & washer and feed coax cable through hole
- Remove bottom plastic liner to expose adhesive
- Press antenna into hole and tighten nut & washer from underneath
- Optionally apply a thin bead of silicone caulk around the antenna rim

Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: www.proxicast.com Tel: 1-877-777-7694

Email: sales@proxicast.com 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: support@proxicast.com

Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.