

ANT-310-020-10

10 ft RP-SMA Male to N Male Coax Cable (240 size)



Applications

- WIFI Hotspots, Routers, Access Points
- Helium (HNT) Miners
- LoRa, ZigBee, Bluetooth Radio Equipment
- Lightning Arresters, RFID Systems



Product Features

- N Male Connector
- Reverse Polarity SMA Male Connector
- 50 Ohm Solid Copper Core
- Gold Plated Signal Pins
- PE Outer Jacket - 0.240 inch Diameter
- Heat Shrink Tubing on Connectors
- Low Signal Loss at High Frequencies

Ordering Information

Part No.	Description
ANT-310-020-10	Proxicast 10 ft Low-Loss Coax Extension Cable (50 Ohm) – RP-SMA Male to N Male

General Description

Proxicast's ANT-310-020-10 N Male to RPSMA Male coax cable is the perfect solution for connecting WiFi, Helium, Bluetooth ZigBee, or LoRa radio to external antennas with N Female connectors up to 10 ft from their radio source. It can also be used to connect to inline lightning arresters, amplifiers or other equipment with N-Female and RPSMA Female connectors.

All of Proxicast's coax extension cable assemblies are constructed with top quality extremely low-loss cable and gold plated connectors. Each cable assembly is fully tested.

CFD240 coax is the same diameter as RG8X but has far superior performance characteristics, matching or exceeding LMR240 cable.

The cable's tough polyethylene jacket withstands abrasions and provides excellent moisture resistance. This cable assembly can be used indoors or outdoors.

All outdoor coax connections must be weather-proofed to prevent damage caused by moisture entering the connectors. Use our Pro-Grade Self-Bonding Silicone Tape ([ANT-900-002](#)) for fast & easy connection sealing.

ANT-310-020-10

10 ft RP-SMA Male to N Male Coax Cable (240 size)



Specifications

Parameter	Rating
Connector 1	Reverse Polarity SMA Male (Inline Plug)
Connector 2	N Male (Inline Plug)
Cable Length	10 ft (4.57m)
Coax Type	Low-loss CFD240-E ¹ (0.240 inch / 6.1 mm diameter) Meets or exceeds specifications of LMR240 ² Not rated for direct burial or plenum applications
Jacket Material	Polyethylene (PE)
Color	Black
Impedance	50 Ohm
Capacitance	79.0 pF/ft
Velocity of Propagation	84%
Minimum Bend Radius	0.75 inch (19.1 mm)
Operating Temperature	-40°F to +185°F (-40°C to +85°C)

Signal Attenuation Including Connectors

Frequency (MHz)	Loss (dB)
700	0.8
900	0.9
1700	1.2
1900	2.3
2400	2.7
2700	2.9
5000	4.1
5800	4.4

Operation outside the parameter ranges given above may cause permanent damage.

¹CFD is a trademark of Raison Enterprise Co. Ltd. (Commate)

²LMR is a trademark of Times Microwave Corporation

ANT-310-020-10



10 ft RP-SMA Male to N Male Coax Cable (240 size)



Mechanical Dimensions

CFD240 Coaxial Cable

Structure Figure

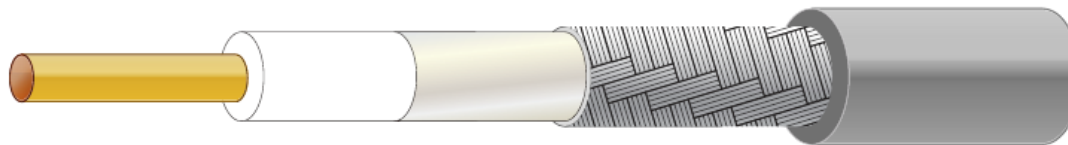

Conductor

Material
Solid Copper Wire

Diameter
Approx. 1.42 mm

Insulation

Material
Foam polyethylene

Diameter
Approx. 3.81 mm

Binder

Material
Aluminum/PE Tape

Diameter
Approx. 3.92 mm

Single Braid

Material
Tinned copper wire

Coverage
84%


Diameter
Approx. 4.5 mm

Jacket

Material
PE or Non Lead PVC

Color
Black

Diameter
Approx. 6.1 mm

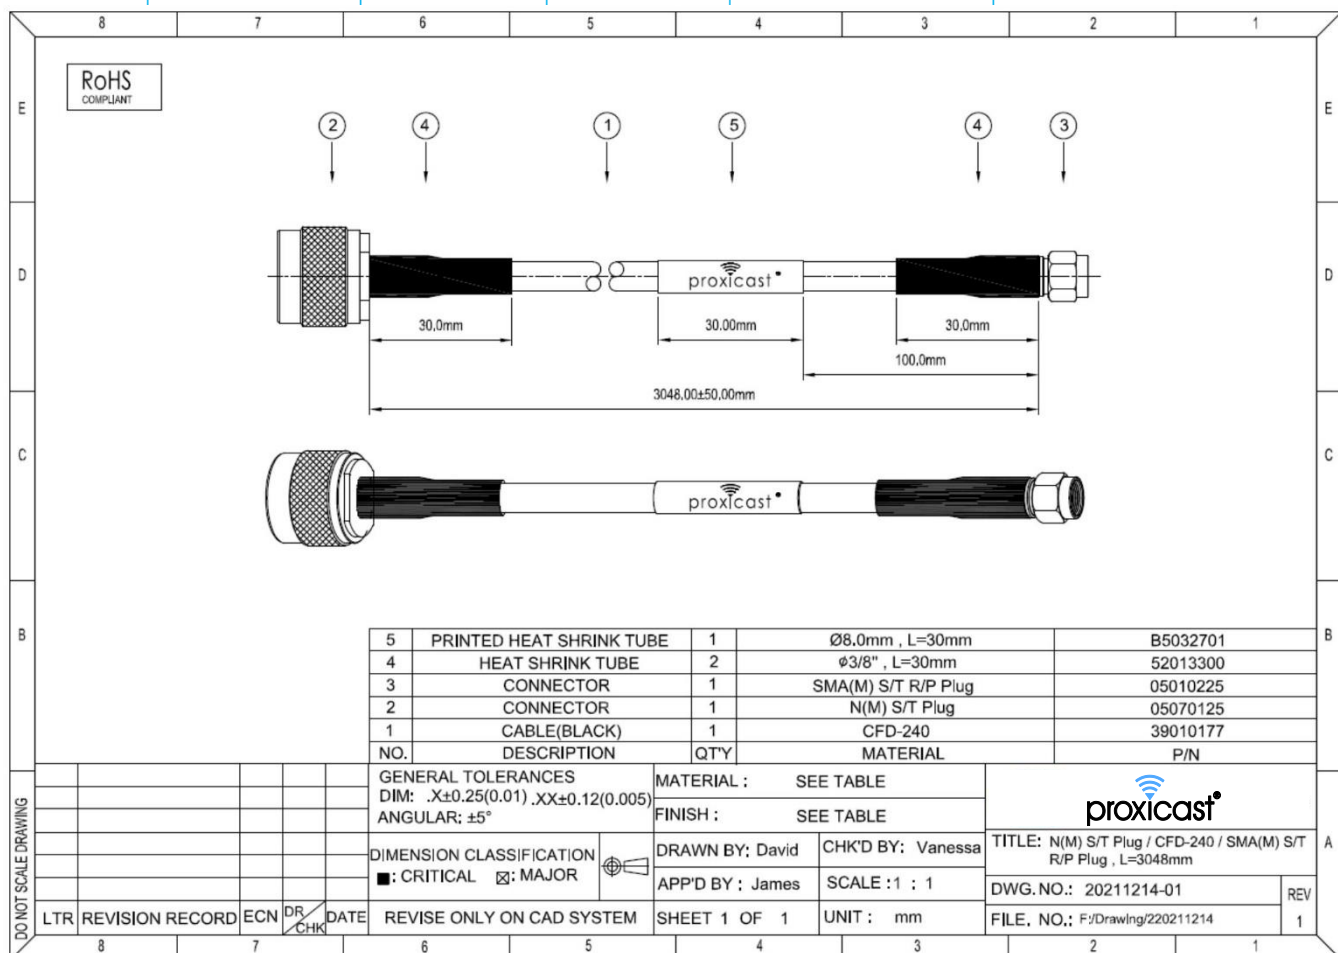

ANT-310-020-10

10 ft RP-SMA Male to N Male Coax Cable (240 size)



Additional Product Images



ANT-310-020-10

10 ft RP-SMA Male to N Male Coax Cable (240 size)



Installation Instructions

- Observe minimum bend radius during installation and handling
- Do not cut or splice
- Minimize the number of connectors and total length of the cable run
- Fully tighten coax connectors to antenna connectors
- Weather seal outdoor coax connections
- Install in-line lightning protection if required by local building, fire, insurance or safety codes
- Not rated for direct burial or plenum applications

Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: www.proxicast.com Tel: 1-877-777-7694

Email: sales@proxicast.com 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: support@proxicast.com

Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.