

# ANT-121-T44

## Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



### Applications

- Kiosks & Vending Machines
- Digital Signage
- Video Surveillance
- Point-of-Sale Terminals
- SCADA / Telemetry / PLCs
- Vehicles

### Product Features

- Vandal Resistant – Through Hole Mount
- Low Profile ~ 2.4 inches Tall
- Weatherproof
- Compatible with all 4G, 5G, FirstNet Networks
- Compatible with most Cellular Modems/Routers
- 3 – 5 dBi Peak Gain
- Omni-Directional MIMO
- 4x SMA Male Connectors on Low-Loss 195 Coax



### Ordering Information

Part No.	Description
ANT-121-T44-B-02	Black Antenna with 2 ft Coax
ANT-121-T44-B-06	Black Antenna with 6 ft Coax
ANT-121-T44-W-02	White Antenna with 2 ft Coax
ANT-121-T44-W-06	White Antenna with 6 ft Coax

Country of Origin: Taiwan  
HTS Code: 8517.71.00.00  
TAA Compliant: Yes

### General Description

This low profile (2.4 inch tall) fixed mount omni-directional 5G external antenna provides 3 to 5 dBi of gain and supports all sub 6 GHz cellular frequency bands for AT&T, Verizon, T-Mobile, Bell, Rogers, Telus and other carriers worldwide.

Permanently mounts via a 7/8 in (20 mm) hole with internal nut. Resists vandalism with no exposed coax cable, a high impact polycarbonate radome shell and an extra thick stainless steel threaded mounting post and hardware. Completely waterproof (IP67).

Four integrated SMA male plug connectors mate with SMA female jacks found on most cellular modems and routers. Available in 2 standard coax cable lengths (2 ft, 6 ft) and black or white radomes. Lengths and colors can be customized (minimum order quantity required).

Ideal for use in vending machines, meter housings, equipment sheds, or other locations requiring a low-profile vandal resistant external antenna. Also suitable for vehicle mounting on buses, vans, trucks or other mobile installations. Completely waterproof (IP67).

\* For optimum performance this antenna should be mounted on a flat, horizontal metal surface at least 8 inches in diameter.

# ANT-121-T44

## Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



### Electrical Specifications

Parameter	Rating
Frequency Range	600~6000 MHz All 4G & 5G Sub-6 (FR1) Bands including FirstNet and CBRS (OnGo)
Peak Gain	3-5 dBi frequency dependent
Radiation Pattern	Omni-Directional
VSWR	< 2.0:1 in band
Inter-element Isolation	-8.5 dB min in band
Input Impedance	50 Ohm
Polarization	Vertical
Max Input Power	50 W
DC Grounded	No
Ground Plane	8 inch (20 cm) diameter min

### Mechanical Specifications

Parameter	Rating
Connector Type	4x SMA Male (plug)
Cable Type	Low-loss CFD195 coax – available in 2 ft & 6 ft lengths
Height	Radome: 2.4 inches (60 mm) above mounting surface Overall: 3.4 inches (84 mm)
Diameter	Radome: 2.2 inches (54.7 mm) at base Mounting post: 7/8 inches (20 mm) x 1.5 mm thread
Weight	7.8 oz (221 g)
Materials	Radome: UV Stabilized Polycarbonate Connectors: Gold-Plated Brass Mounting Post & Hardware: Stainless Steel Gasket: Rubber RoHS Compliant
Antenna Color	Black or White
Operating Temperature	-40°C to +80°C
Environmental Rating	IP67 (waterproof)
Shock (Drop Test)	100 cm drop on concrete


Operation of this device outside the parameter ranges given above may cause permanent damage.

# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Mechanical Dimensions


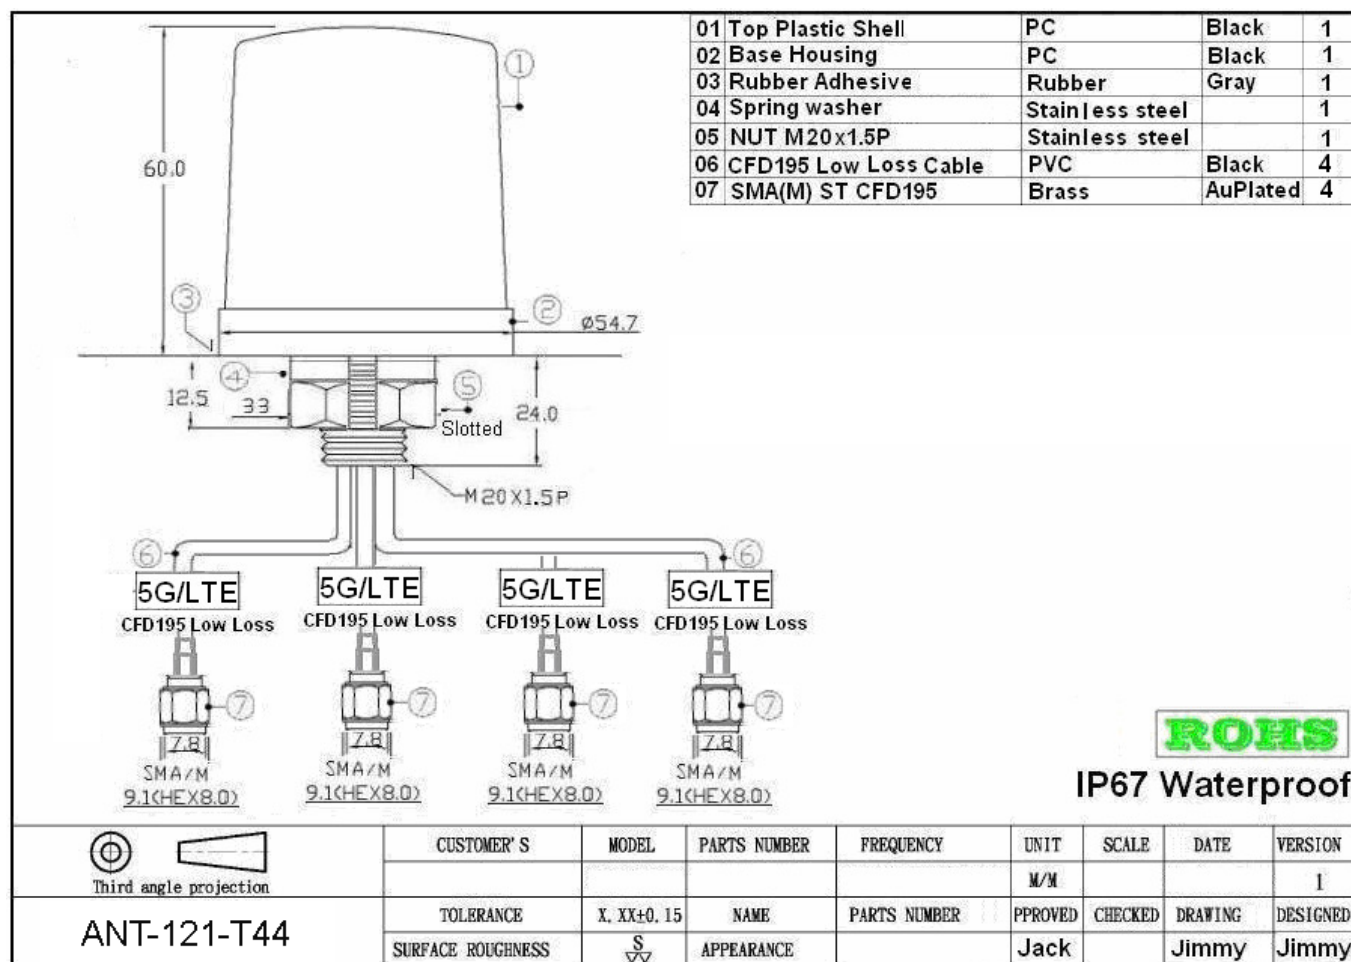


# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Additional Product Images

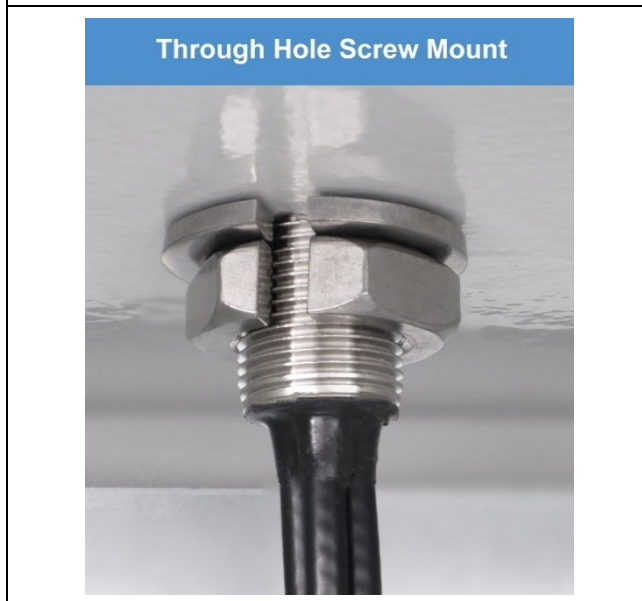
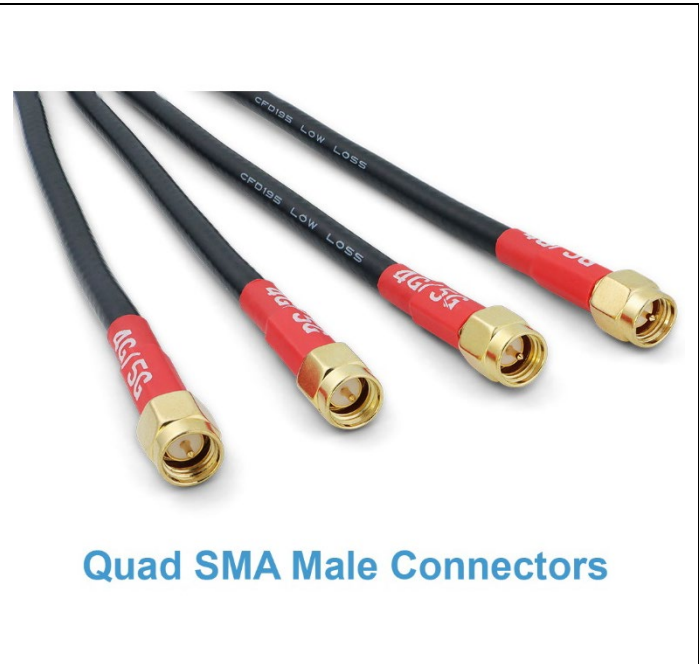


## Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Radiation Patterns

**740 MHz**

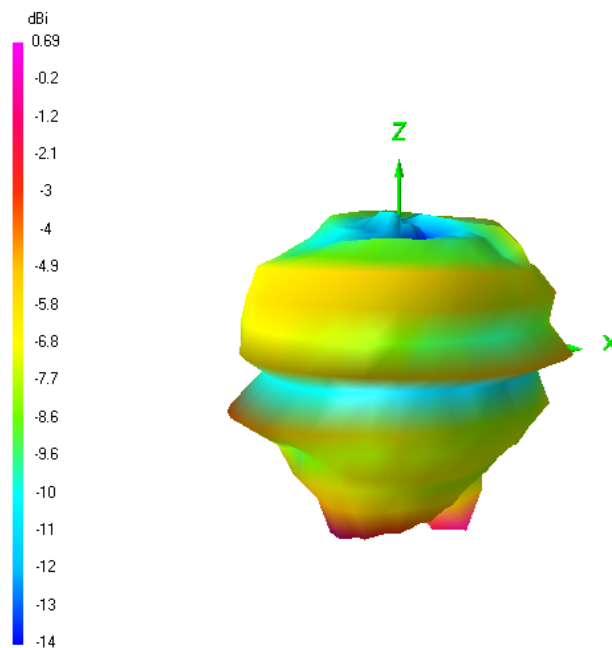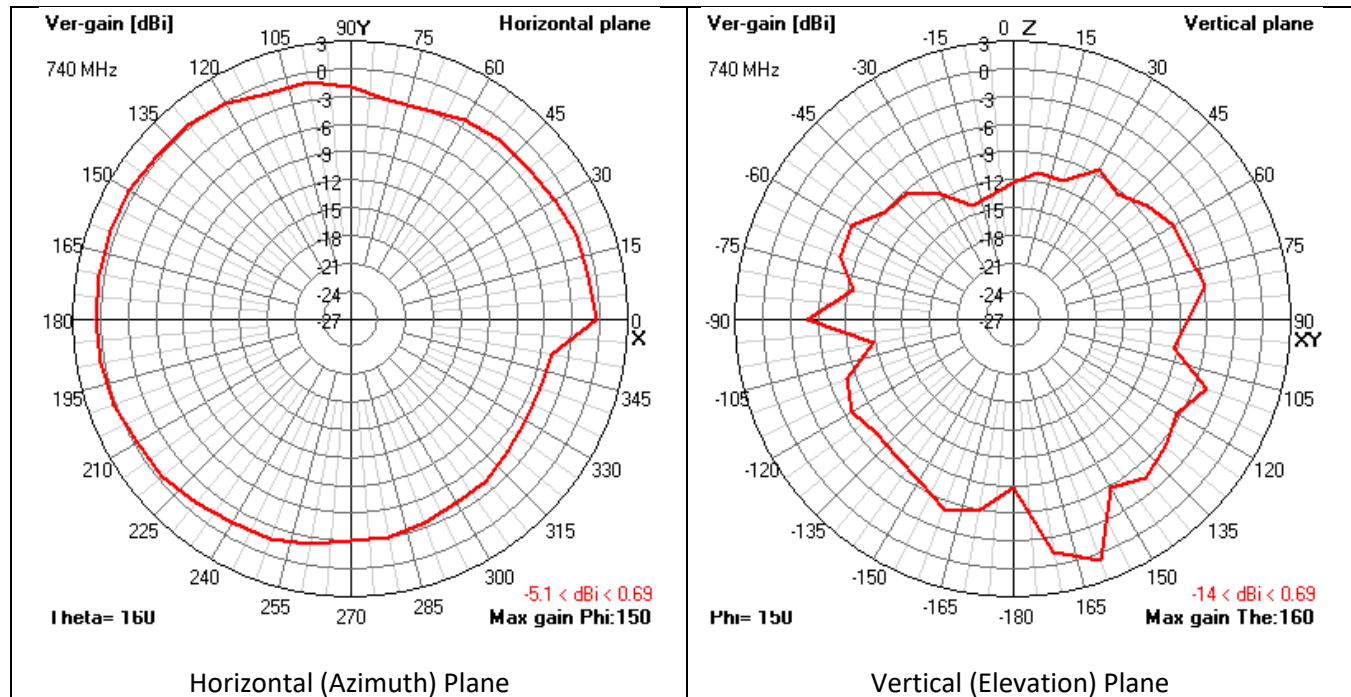



# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Radiation Patterns

840 MHz

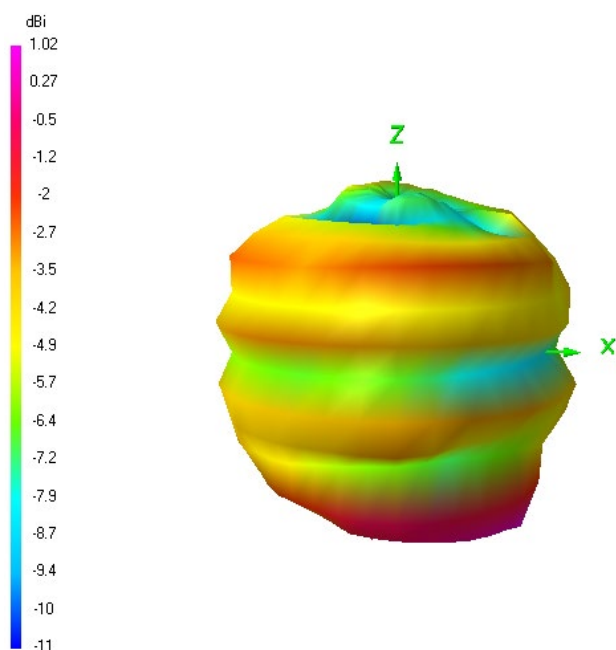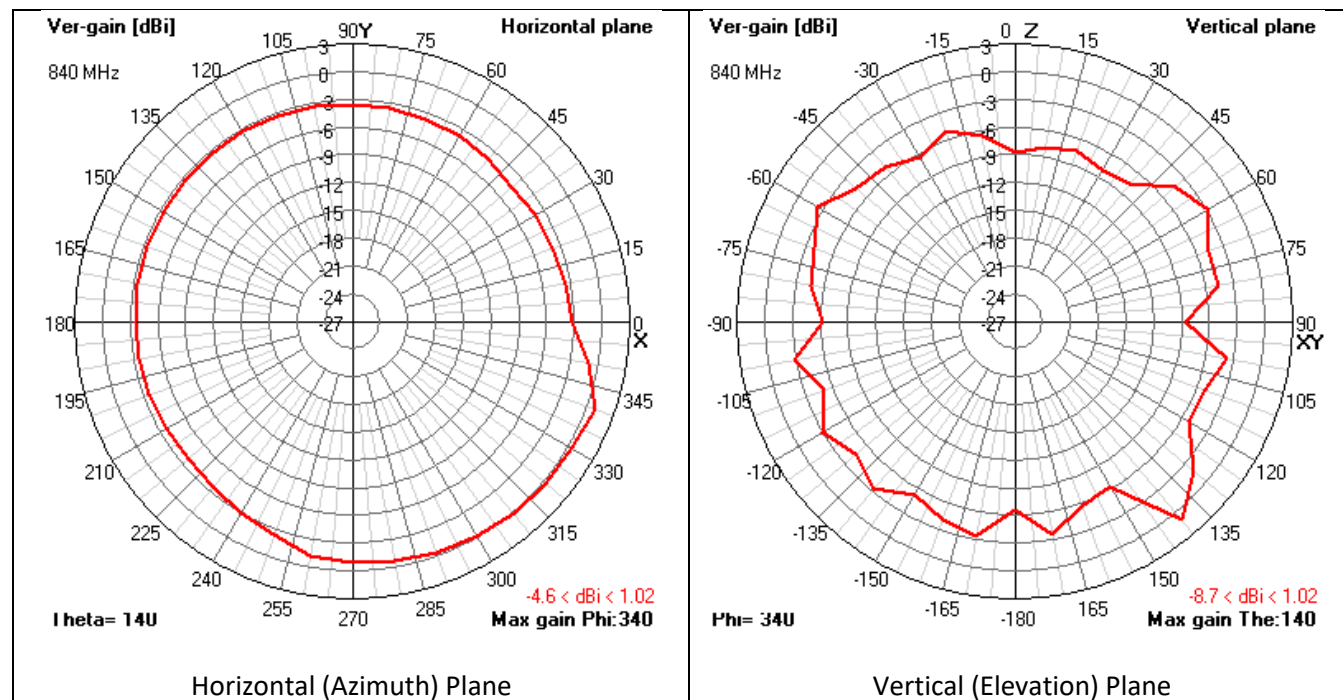





# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Radiation Patterns

1800 MHz

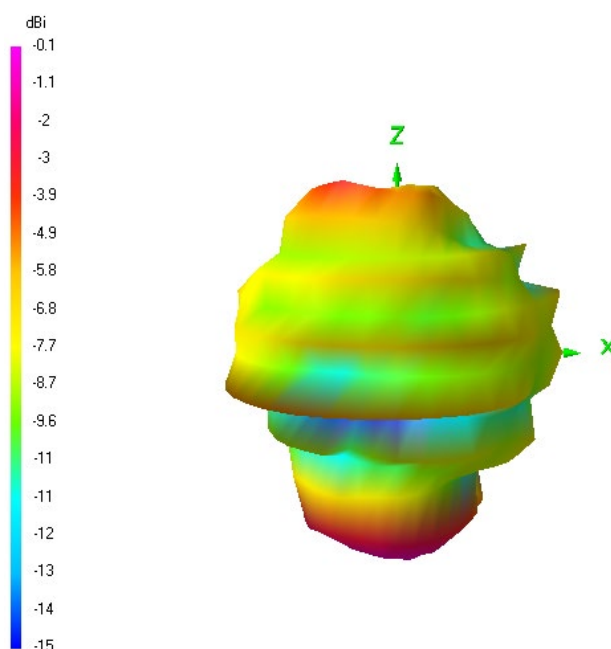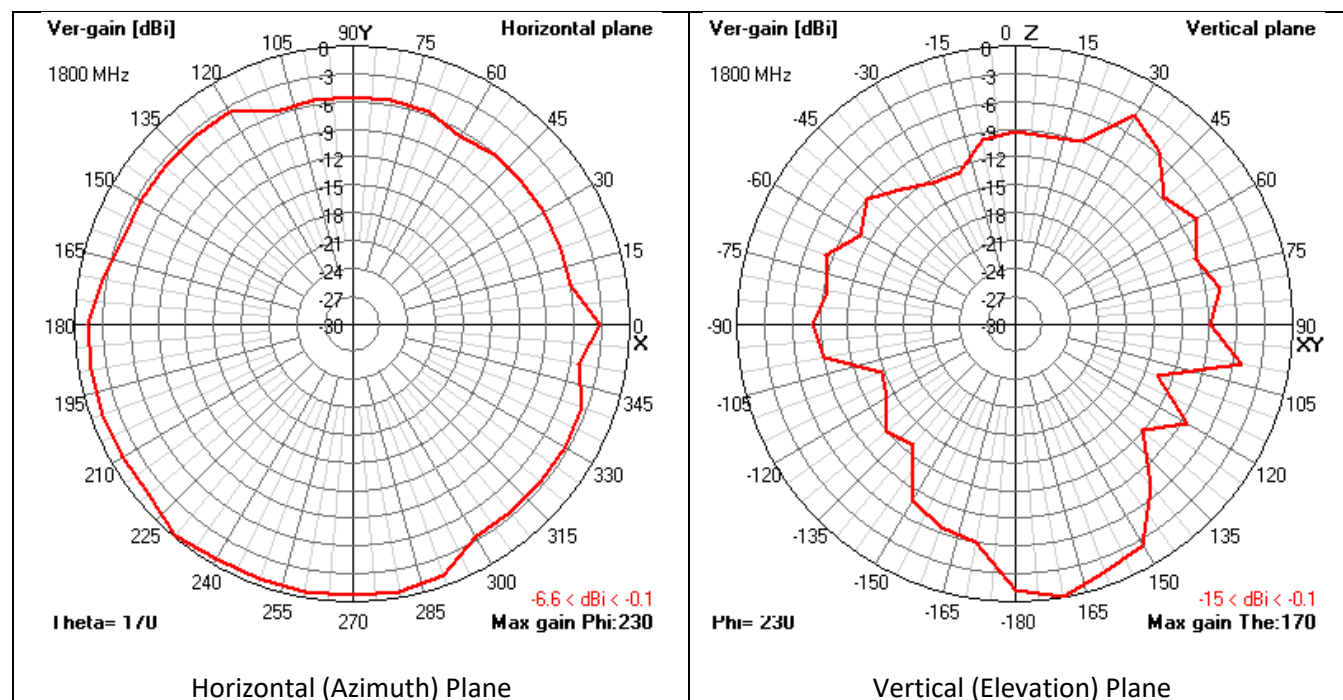



# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Radiation Patterns

1960 MHz

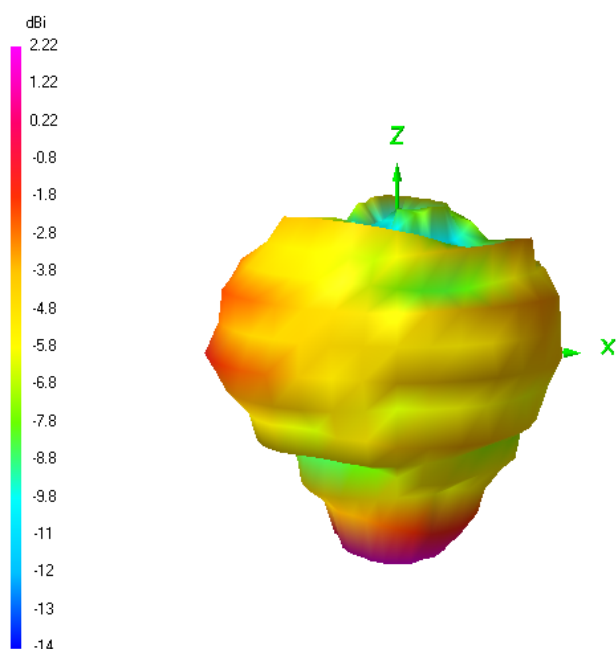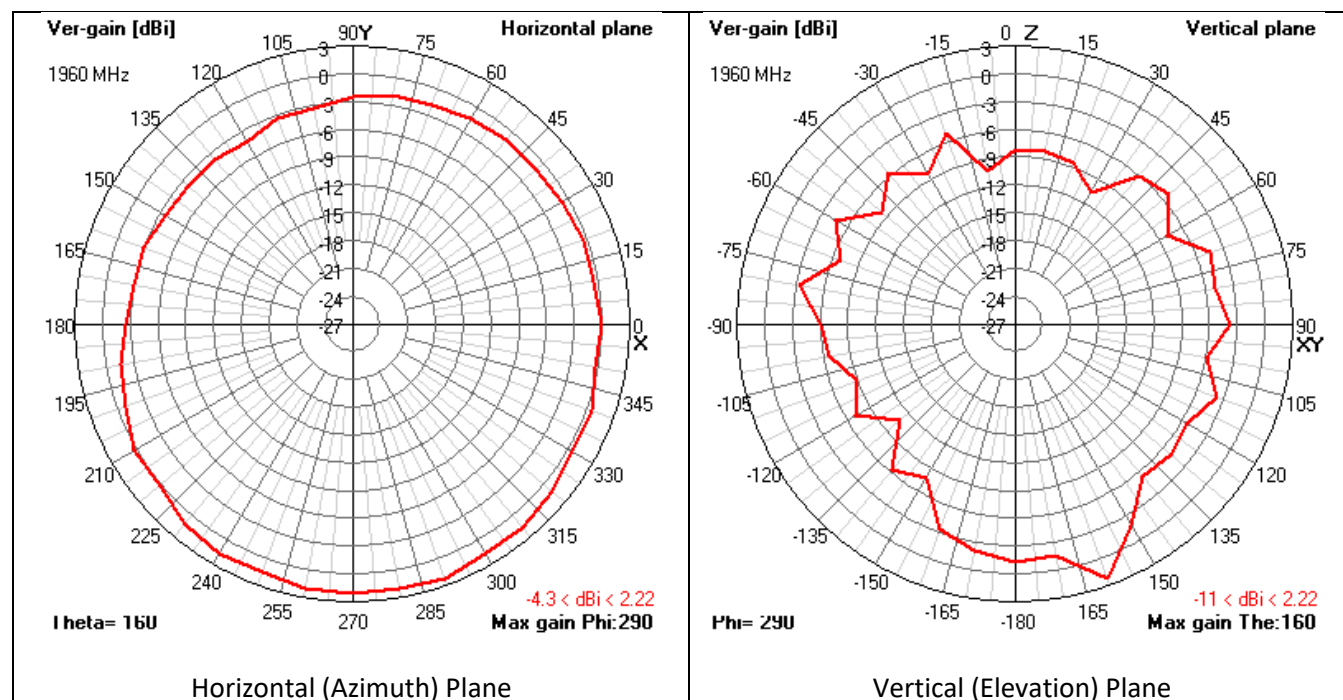





# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Radiation Patterns

3960 MHz

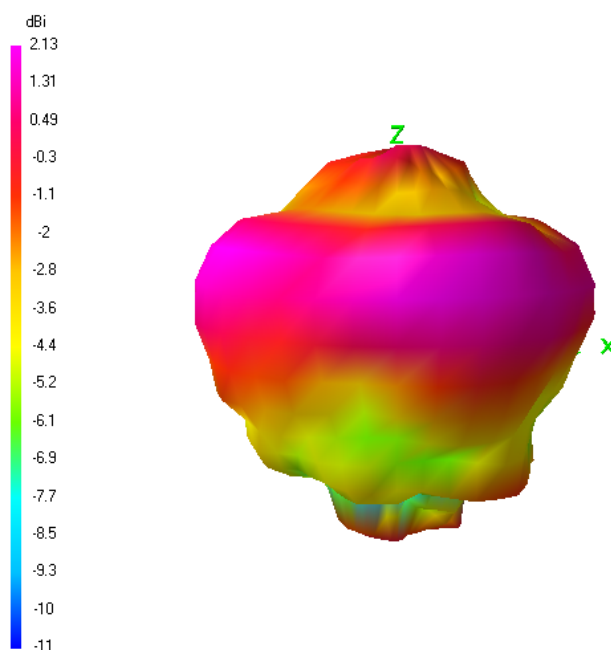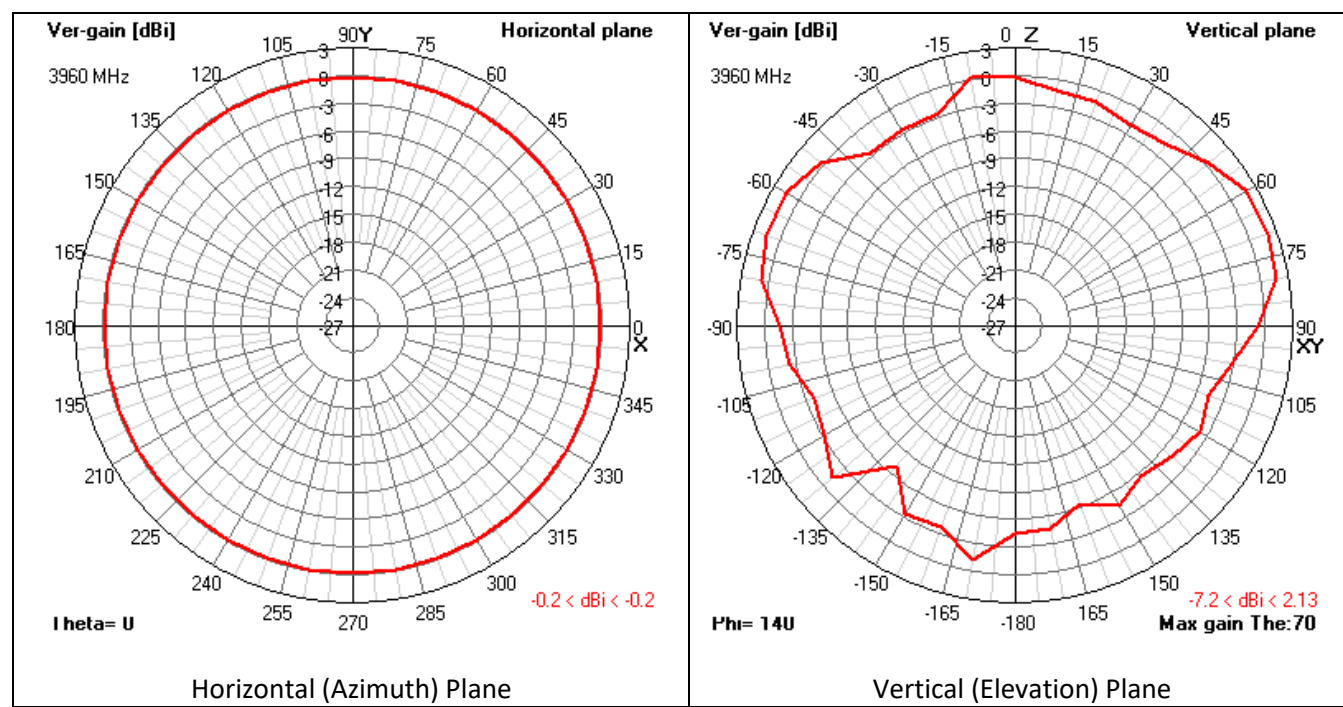



# ANT-121-T44

Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna



## Radiation Patterns

5800 MHz

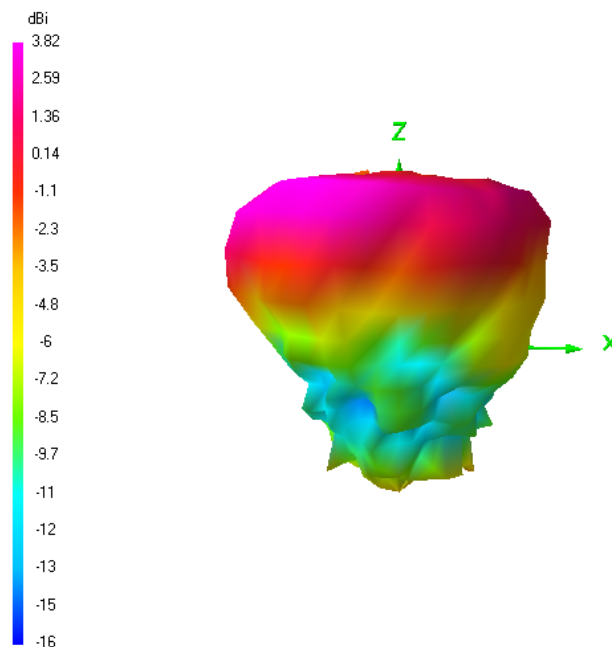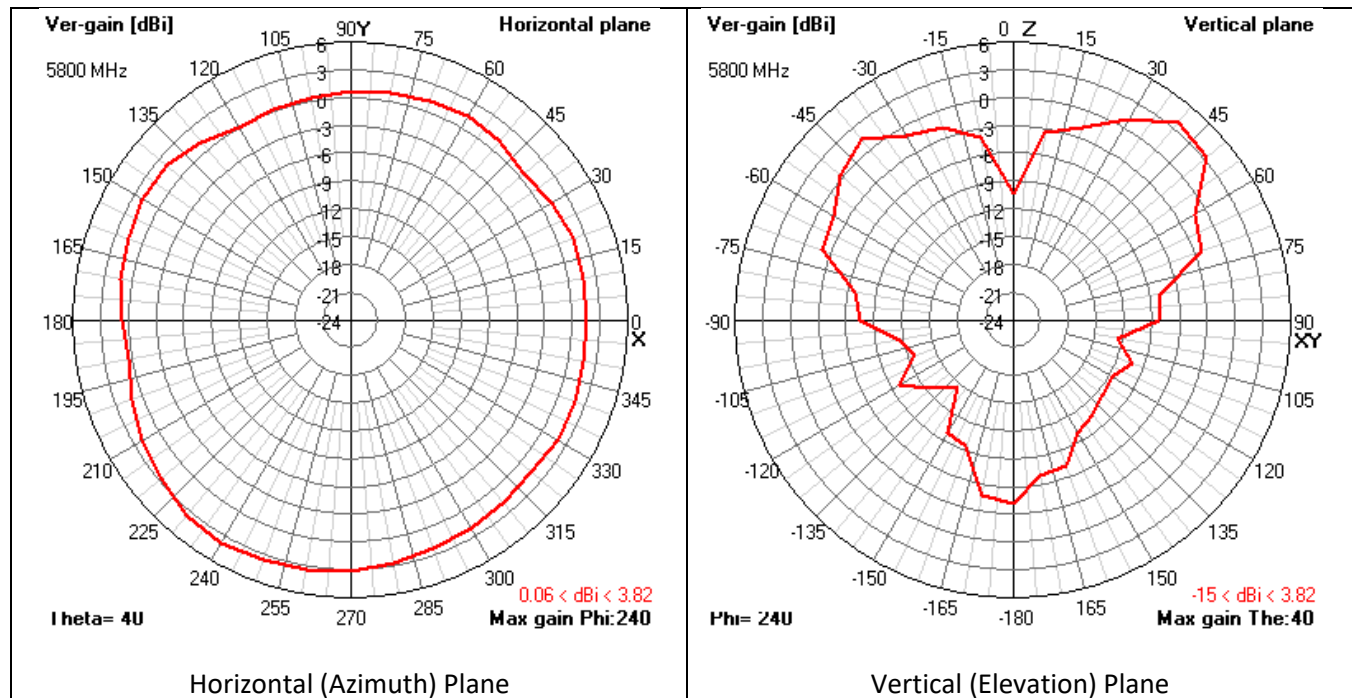

# ANT-121-T44

## ***Vandal Resistant 4G/5G 4x4 MIMO Omni Antenna***



- Position away from:
  - CRT/TVs
  - Lighting fixtures & motors
  - Other antennas & wireless devices
  - Low-E or tinted/coated windows
  - Large vertical metal or concrete objects
- Drill a 7/8" (20mm) hole in flat horizontal surface
- Remove mounting nut and feed coax cable through hole
- Press antenna into hole and tighten nut & washer from underneath
- Optionally apply a thin bead of silicone caulk around the antenna rim
- Keep coax lead cable as short as possible & weatherproof all outdoor connectors

### Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: [www.proxicast.com](http://www.proxicast.com) Tel: 1-877-777-7694

Email: [sales@proxicast.com](mailto:sales@proxicast.com) 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: [support@proxicast.com](mailto:support@proxicast.com)

### Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.