

ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Applications

- Kiosks
- Vending Machines
- Digital Signage
- Video Surveillance
- Point-of-Sale Terminals
- SCADA / Telemetry / PLCs



Product Features

- 2 MIMO Elements in Single Radome
- Ultra Low Profile ~ 0.6 inches Tall
- Strong Magnetic and 3M Adhesive Mounting
- Vandal Resistant & Weatherproof
- Compatible with all 3G & 4G/LTE Networks
- 2.5 dBi Peak Gain
- Omni-Directional
- SMA Male Connectors on 6 ft Low-Loss Coax

Ordering Information

Part No.	Description
ANT-122-M01	Proxicast Ultra Low Profile MIMO 4G / LTE Omni-Directional 2.5 dBi Puck Magnetic/Adhesive Mount Antenna

General Description

This extremely low profile (< 0.6 inches tall) fixed mount omni-directional antenna provides up to 2.5 dBi of gain and works on all 3G & 4G cellular frequency bands worldwide (all CDMA, GSM, WCDMA/UMTS and LTE carriers) including AT&T, Verizon, Sprint, T-Mobile, Bell, Rogers and Telus.

Mounts via strong internal magnet or integrated 3M adhesive pad. Includes 6 ft of low-loss coax fed through side of antenna radome. Completely waterproof (IP67).

Designed for M2M applications such as vending machines, meter housings, equipment sheds, or other locations requiring an inconspicuous low-profile external antenna. Can also be vehicle mounted for buses, vans, trucks or other mobile installations.

Dual integrated SMA male plug connectors mate with SMA female jacks on MIMO capable modems, routers, etc.

For optimum performance this antenna should be mounted through a flat, horizontal metal surface at least 8 inches in diameter.

ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Electrical Specifications

Parameter	Rating
Frequency Range	698-960 / 1710-2700 MHz includes all 2G, 3G, 4G, LTE Bands
Peak Gain	2.5 dBi
VSWR	≤ 3
Input Impedance	50 Ohm
Polarization	Linear
Max Input Power	50 W
DC Grounded	No
Recommended Ground Plane	8 inch (20 cm) diameter min

Mechanical Specifications

Parameter	Rating
Connector Type	SMA Male (plug) x 2
Cable Length	6 ft (2 m) of LMR RG174 low-loss coax
Height	Radome: 0.6 inches (15 mm) above mounting surface
Diameter	Radome: 3.2 inches (81.3 mm)
Weight	4 oz (112 g)
Materials	Radome: UV stabilized ABS plastic Connector: Brass with Nickel plating Adhesive Pad: Urethane Foam
Antenna Color	Black
Vibration	10 to 55Hz with 1.5mm amplitude 2hours
Operating Temperature	-40°C to +85°C
Environmental Rating	IP67 (waterproof) RoHS compliant


Operation of this device outside the parameter ranges given above may cause permanent damage.

ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Mechanical Dimensions

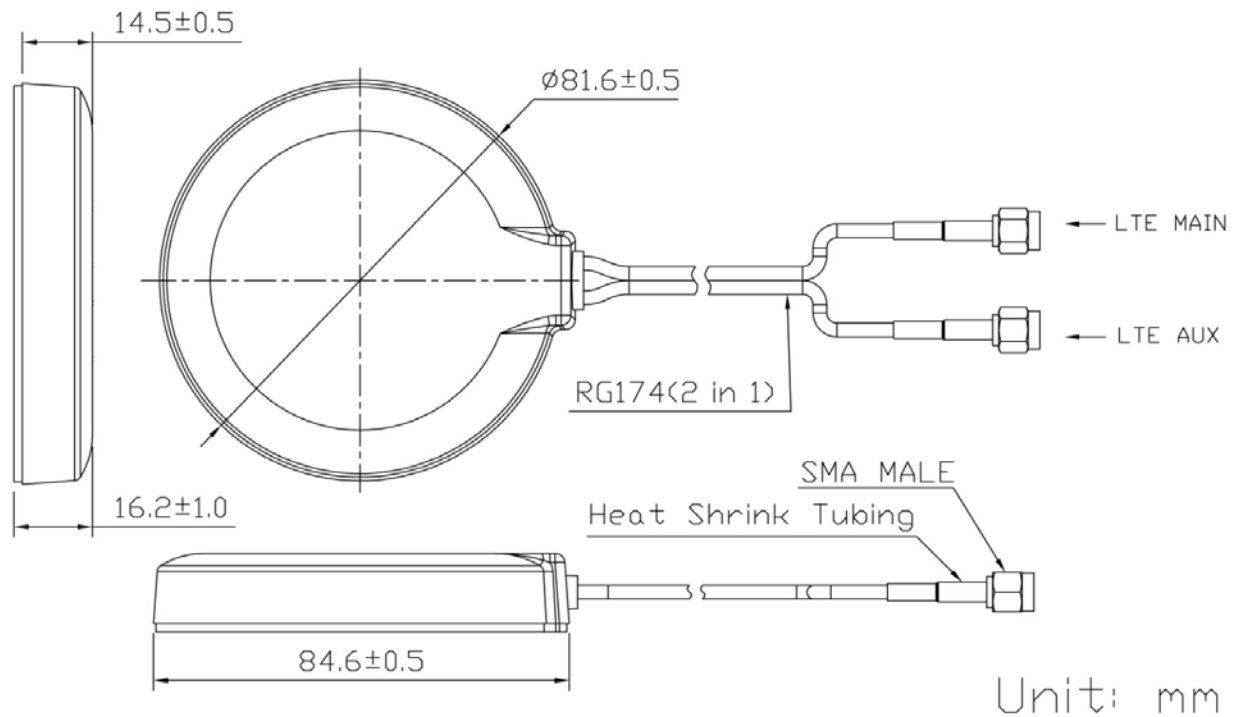

Product Images





ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Radiation Patterns

890 MHz

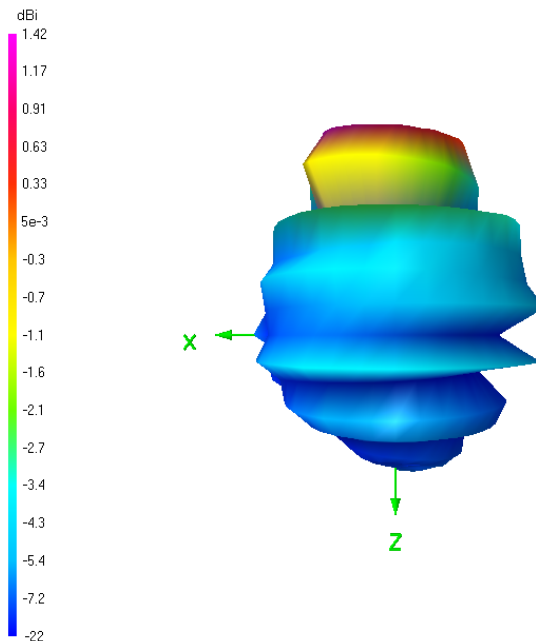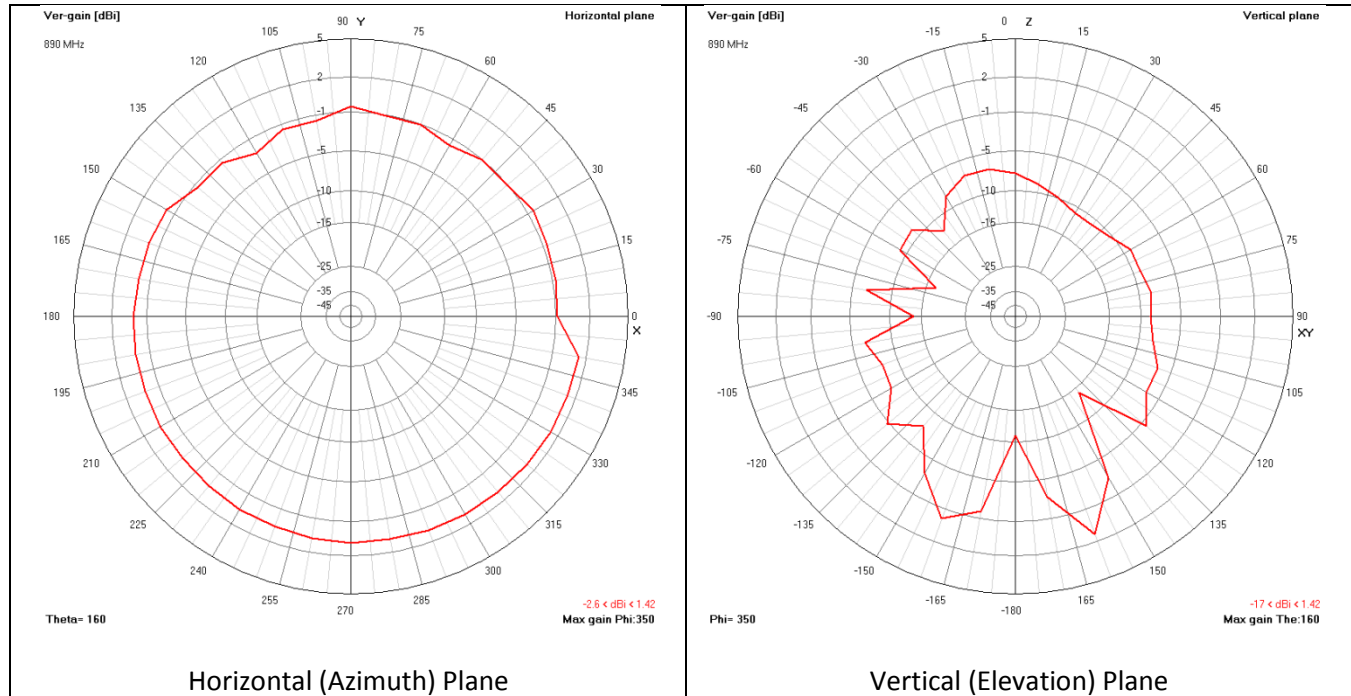



ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Radiation Patterns

1980 MHz

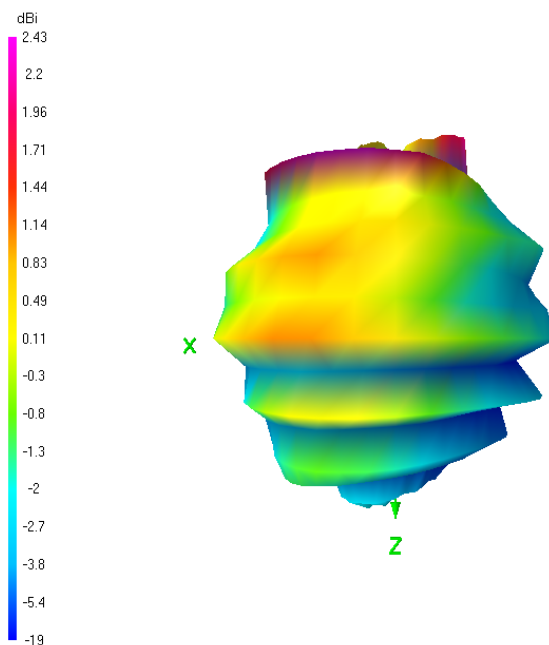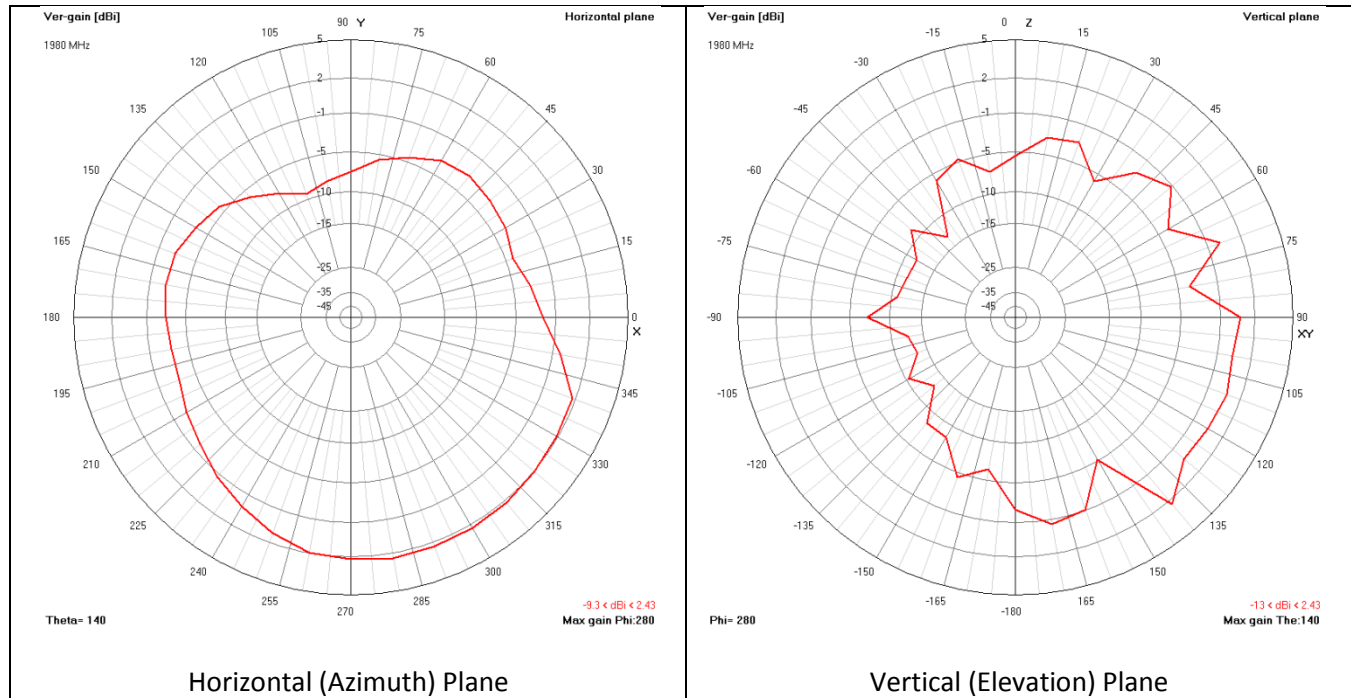



ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Radiation Patterns

2580 MHz

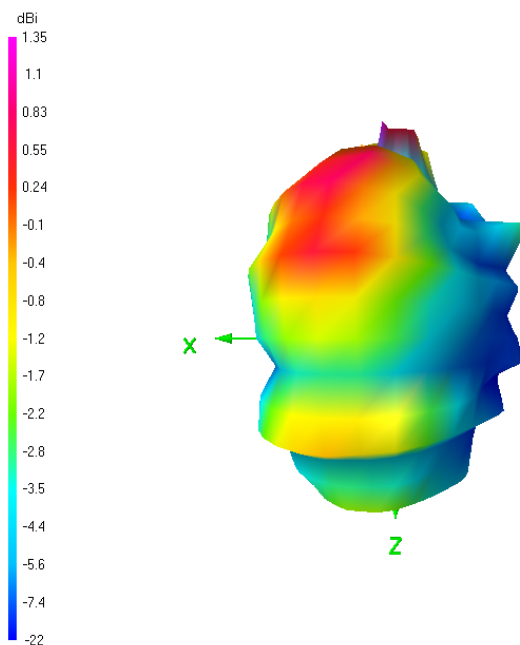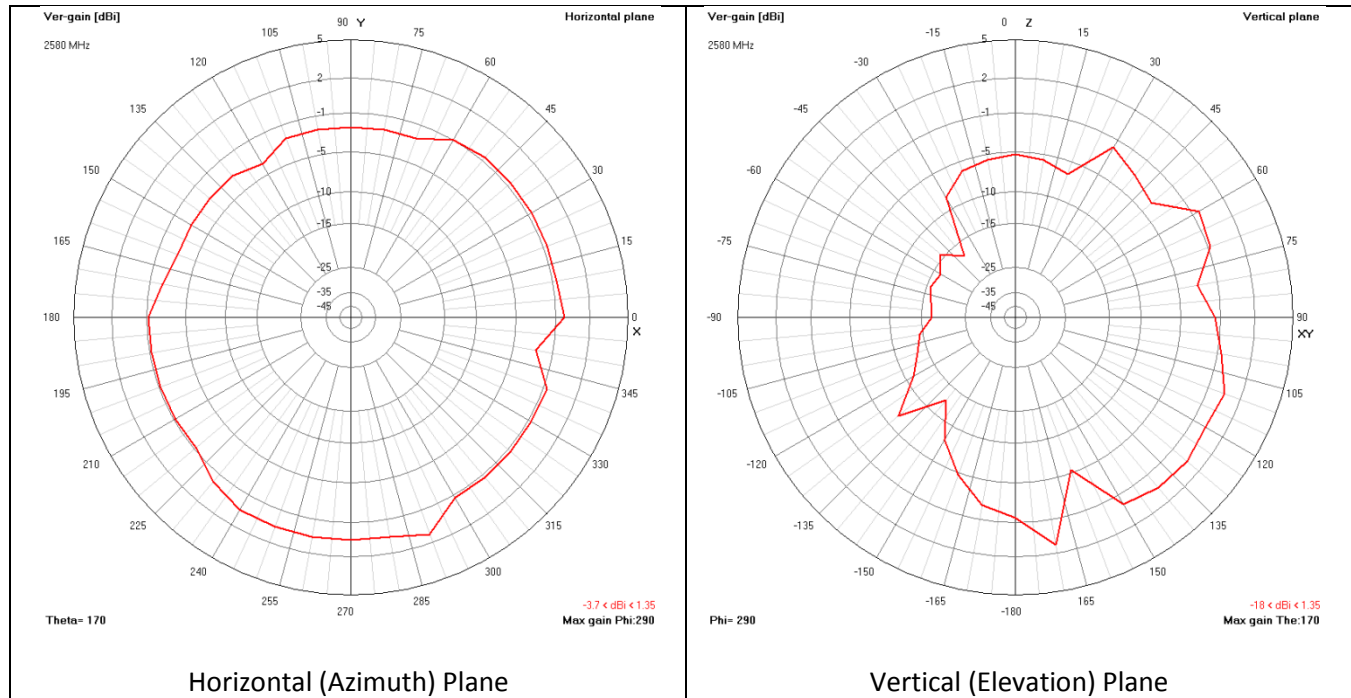

ANT-122-M01

Low Profile MIMO 4G/LTE Omni Mag/Adhesive Antenna



Installation Instructions

- Position away from:
 - CRT/TVs
 - Lighting fixtures & motors
 - Other antennas & wireless devices
 - Low-E or tinted/coated windows
 - Large vertical metal or concrete objects
- Mount to a flat horizontal metal surface at least 8 inches in diameter
- Remove bottom plastic liner to expose adhesive
- Keep total coax lead cable as short as possible & weatherproof all outdoor connectors

Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: www.proxicast.com Tel: 1-877-777-7694

Email: sales@proxicast.com 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: support@proxicast.com

Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.