

# ANT-131-002

## Vandal Resistant Tri-Band WiFi Omni Antenna



### Applications

- Kiosks
- Vending Machines
- Digital Signage
- Video Surveillance
- Point-of-Sale Terminals
- SCADA / Telemetry / PLCs

### Product Features

- Vandal Resistant
- Low Profile ~ 3 inches Tall
- Weatherproof
- Compatible with all WiFi standards  
(a/b/g/n/ac/ax/be)
- Compatible with most WiFi Access Points/Routers
- 3 – 5 dBi Peak Gain
- Omni-Directional
- RP-SMA Male Connector on 10 ft Low-Loss Coax



### Ordering Information

Part No.	Description
ANT-131-002	Vandal Resistant Low Profile Triple Band WiFi Omni-Directional Antenna - 3-5 dBi Gain - Fixed Mount - 10 ft Coax Lead

### General Description

This low profile (~ 3 inches tall) fixed screw mount omni-directional antenna provides 3 to 5 dBi of gain and works on all 2.4, 5.8 and 6-7 GHz WiFi frequency bands worldwide.

Ideal for use in vending machines, meter housings, equipment sheds, NEMA enclosures or other locations requiring a low-profile vandal resistant external antenna. Also suitable for vehicle mounting on buses, vans, trucks or other mobile installations.

Permanently mounts via a 1/2 in. (13 mm) hole with locking internal nut. Resists vandalism with no exposed coax cable, high impact ABS radome shell and an extra thick threaded mounting post. Includes 10 ft of low-loss RG58U coax fed through center mounting post. Includes "L" bracket for optional wall mounting.

Integrated RP-SMA male plug connector mates with RP-SMA female jack found on most WiFi access points and routers.

Completely waterproof (IP67) when properly installed with post extending into a water-tight enclosure. Not waterproof when used exclusively with wall bracket.

For optimum performance this antenna should be mounted on a flat, horizontal metal surface at least 8 inches in diameter.

# ANT-131-002

## Vandal Resistant Tri-Band WiFi Omni Antenna



### Electrical Specifications

Parameter	Rating
Frequency Range	2400-2483 / 5150-5250 / 5725-5850 / 5925-7125 MHz 802.11 a, b g, n, ac, ax, be
Gain	3 – 5 dBi
VSWR	≤ 2.0:1
Input Impedance	50 Ohm
Polarization	Vertical
Max Input Power	50 W
DC Grounded	No
Ground Plane	8 inch (20 cm) diameter min

### Mechanical Specifications

Parameter	Rating
Connector Type	Reverse Polarity SMA Male (plug)
Cable Length	10 ft (3 m) of RG58U low-loss coax
Height	Radome: 3.2 inches (82 mm) above mounting surface Overall: 4.0 inches (102 mm)
Diameter	Radome: 1.9 inches (48 mm) at base Mounting post diameter: 0.5 inches (12 mm) Mounting post length: 0.7 inches (18 mm)
Weight	5.2 oz (147 g excluding mounting bracket)
Materials	Radome: UV stabilized ABS plastic Connector: Brass with Nickel plating Mounting Bracket: Aluminum Adhesive Pad: Urethane Foam RoHS Compliant
Antenna Color	Black
Operating Temperature	-40°C to +70°C
Environmental Rating	IP67 (waterproof)


Operation of this device outside the parameter ranges given above may cause permanent damage.

# ANT-131-002


**Vandal Resistant Tri-Band WiFi Omni Antenna**



## Mechanical Dimensions

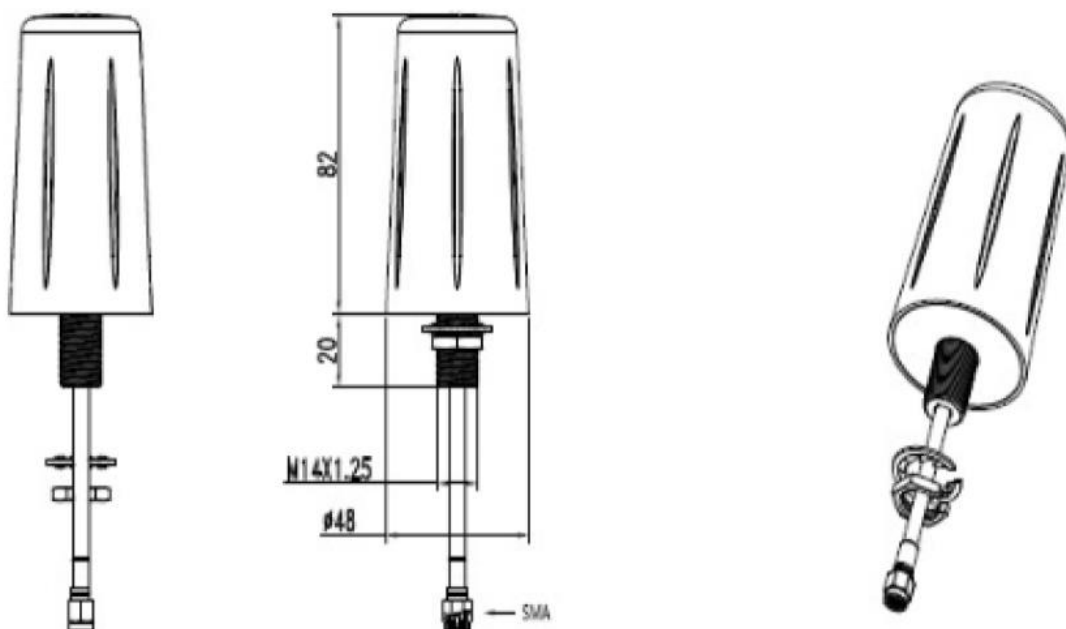

## With Wall Mounting Bracket

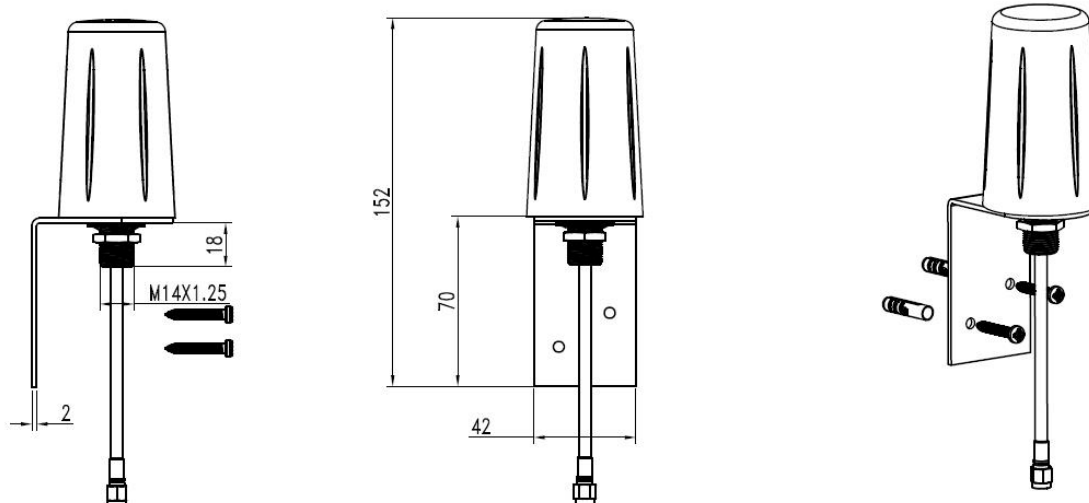


# ANT-131-002

Vandal Resistant Tri-Band WiFi Omni Antenna



## Radiation Patterns

### 2400 MHz

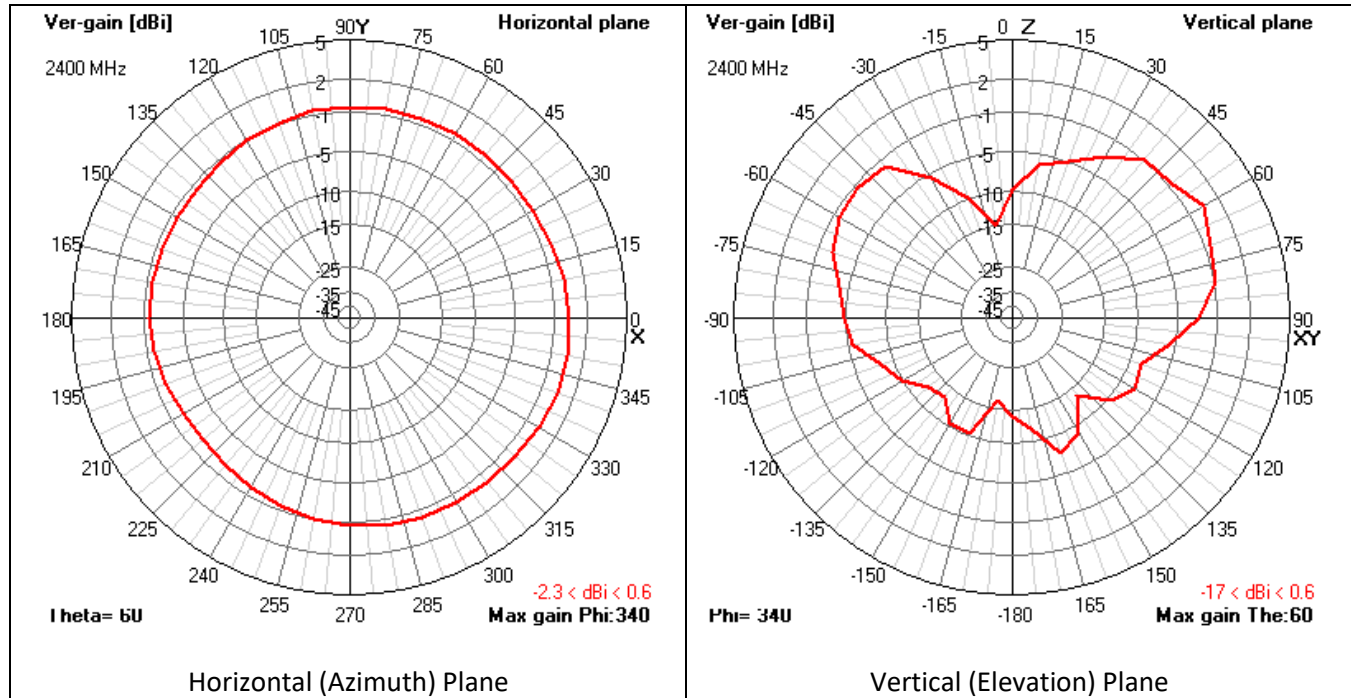


# ANT-131-002

Vandal Resistant Tri-Band WiFi Omni Antenna



## Radiation Patterns

5800 MHz

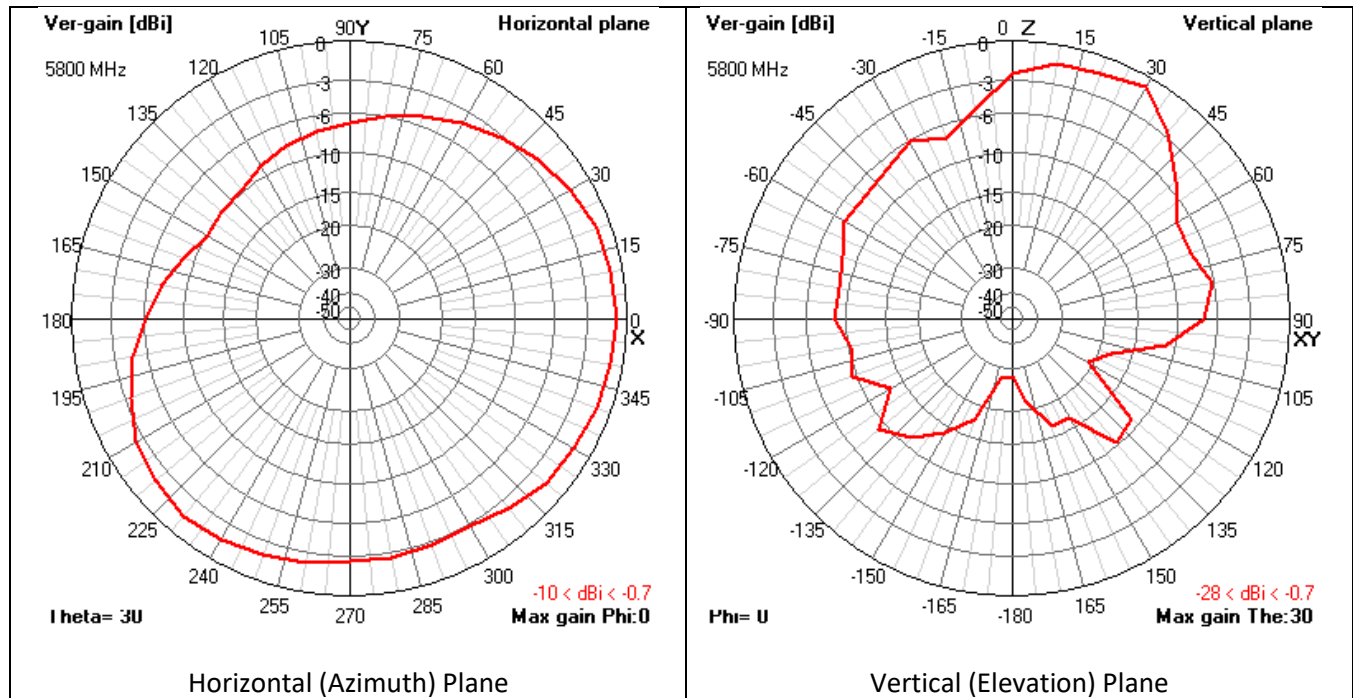

### Installation Instructions

- Position away from:
  - CRT/TVs
  - Lighting fixtures & motors
  - Other antennas & wireless devices
  - Low-E or tinted/coated windows
  - Large vertical metal or concrete objects
- Drill a 1/2" (13mm) hole in flat horizontal surface
- Remove mounting nut & washer and feed coax cable through hole
- Remove bottom plastic liner to expose adhesive
- Press antenna into hole and tighten nut & washer from underneath
- Optionally apply a thin bead of silicone caulk around the antenna rim
- Weatherproof all outdoor connectors

### Contact Information

For the latest specifications, additional product information, worldwide sales and information about Proxicast:

Web: [www.proxicast.com](http://www.proxicast.com) Tel: 1-877-777-7694

Email: [sales@proxicast.com](mailto:sales@proxicast.com) 1-412-213-2477

Proxicast • 312 Sunnyfield Drive, Suite 200 • Glenshaw, PA 15116 USA

For technical questions and application information:

Email: [support@proxicast.com](mailto:support@proxicast.com)

### Important Notice

The information contained herein is believed to be reliable. Proxicast makes no warranties regarding the information contained herein. Proxicast assumes no responsibility or liability whatsoever for any of the information contained herein. Proxicast assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. Proxicast products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.